SIGMA WATERWORKS


RMB1527NSW-HD
HD POLYMER ENCLOSURE

RMB1527NSW-HD

NON-STACKING STRAIGHT WALL HD METER BOX

Meter Box

- SIGMA Waterworks Non-Stacking Straight Wall Meter Boxes are produced using Polyethylene regrind and virgin resins.
- Wall thickness shall be 1/2" solid wall and such that when buried, it will support an incidental traffic load with the appropriate traffic rated lid.
- The box will have two pre-formed pipe entry areas, located at the center of each end (short side) of the box.
- Interior shall be smooth and optional bright white polyethylene.
- Straight Wall Meter Box shall have an integral flat settling plate around the base.
- Box colors available: Black, Gray, Purple, Green, Blue & Tan





Part Number	"D" Dim. (In.)
RMB152712NSW-HD	12
RMB152714NSW-HD	14
RMB152718NSW-HD	18
RMB152724NSW-HD	24

LOAD RATING DEPENDS ON BOX/LID COMBINATION

See page 2 for lid options & ratings.

Dimensions

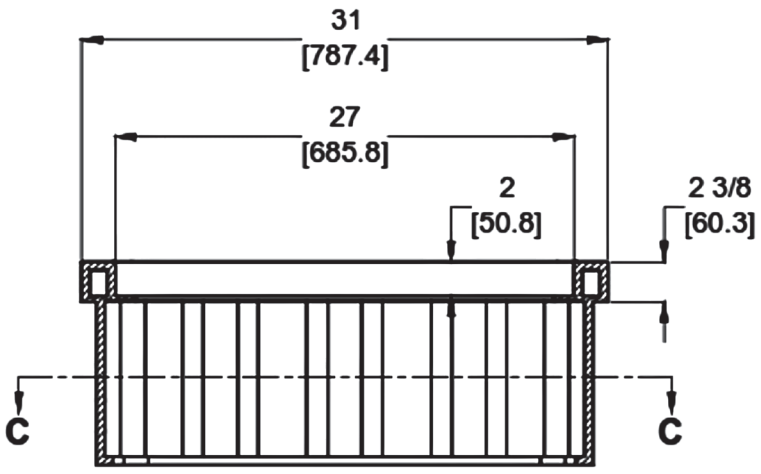

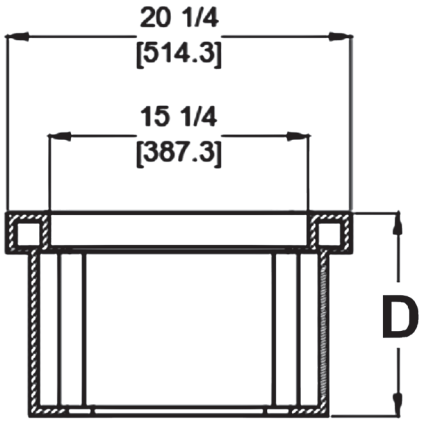

Made in the USA

SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514

Phone: 800.999.2550


SIGMA WATERWORKS


RMB1527NSW-HD
HD POLYMER ENCLOSURE


LID OPTIONS

FOR RMB1527NSW-HD METER BOX

LOAD RATING DEPENDS ON BOX/LID COMBINATION







FEATURE	SPE LYTE LID	SPE TUFF LID	SPE MAXX-DI LID
VLR‡	Pedestrian	T-15	T-15
Material	100% Virgin Polymer†	100% Virgin Polymer†	65-45-12 Ductile Iron per ASTM A536
Density	0.935 to 0.941 g/cc	0.935 to 0.941 g/cc	—
Manufacturing	Roto-Molding	Injection Molding	—
ADA Slip Resistant*	✓	✓	✓
Negligible Signal dB Loss**	✓	✓	—
Additional Markings***	✓	✓	—
Colors	Black, Gray, Purple, Green, Blue, Tan	Black, Gray, Purple, Green, Blue, Tan	Black, Gray, Purple, Green, Blue, Tan§
Detectable	✓	✓	✓
No-Float	Locking Features Available Upon Request	✓	✓
Read Options	Plain, Flip-Read, Touch-Read	Plain, Touch-Read	Plain, Flip-Read, Touch-Read

Notes

‡ Higher VLR available upon request.
† For consistency in material & quality; UV inhibitors to be added, supports RF-transparency.
* Meets ADA slip resistant requirements: coefficient of static friction @ 0.73 (dry) and not less than 0.50 (wet).
** Signal strength dB loss is negligible when compared to a box with no lid.
*** Additional markings such as “SEWER”, “WATER”, blank, or township specific are available.
— Not listed for this lid.
§ MAXX-DI lids may be painted in the listed colors upon request.

Made in the USA

SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514
Phone: 800.999.2550