
SIGMA WATERWORKS

RMB1527NSW
MEDIUM DUTY POLYMER ENCLOSURE

RMB1527NSW MEDIUM DUTY
NON-STACKING STRAIGHT WALL METER BOX

Meter Box

- SIGMA Waterworks Non-Stacking Straight Wall Meter Boxes are produced using Polyethylene regrind and virgin resins.
- Wall thickness shall be 1/2" constructed with three layers. The center of which is foam insulation, and such that when buried, it will support an incidental traffic load with the appropriate traffic rated lid.
- The box will have two pre-formed pipe entry areas, located at the center of each end (short side) of the box.
- Interior shall be smooth and optional bright white polyethylene.
- Straight Wall Meter Box shall have an integral flat settling plate around the base.




Part Number	"D" Dim. (In.)
RMB152712NSW	12
RMB152714NSW	14
RMB152718NSW	18
RMB152724NSW	24

LOAD RATING DEPENDS ON BOX/LID COMBINATION

See page 2 for lid options & ratings.

Dimensions

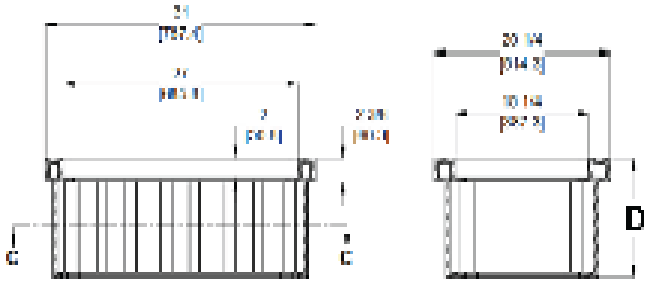

Made in the USA

SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514

Phone: 800.999.2550

SIGMA WATERWORKS


RMB1527NSW


MEDIUM DUTY POLYMER ENCLOSURE


LID OPTIONS

FOR RMB1527NSW METER BOX

LOAD RATING DEPENDS ON BOX/LID COMBINATION







FEATURE	SPE LYTE LID	SPE TUFF LID	SPE MAXX-DI LID
VLR‡	Pedestrian	H20-A12	T-15
Material	100% Virgin Polymer†	100% Virgin Polymer†	65-45-12 Ductile Iron per ASTM A536
Density	0.935 to 0.941 g/cc	0.935 to 0.941 g/cc	—
Manufacturing	Roto-Molding	Injection Molding	—
ADA Slip Resistant*	✓	✓	✓
Negligible Signal dB Loss**	✓	✓	—
Additional Markings***	✓	✓	—
Colors	Black, Gray, Purple, Green, Blue	Black, Gray, Purple, Green, Blue	Bare, Black, Gray, Purple, Green, Blue
Detectable	✓	✓	✓
No-Float	Locking Features Available Upon Request	✓	✓
Read Options	Plain, Flip-Read, Touch-Read	Plain, Touch-Read	Plain, Flip-Read, Touch-Read

Notes

‡ Higher VLR available upon request.
† For consistency in material & quality; UV inhibitors to be added, supports RF-transparency.
* Meets ADA slip resistant requirements: coefficient of static friction @ 0.73 (dry) and not less than 0.50 (wet).
** Signal strength dB loss is negligible when compared to a box with no lid.
*** Additional markings such as “SEWER”, “WATER”, blank, or township specific are available.
— Not listed for this lid.

Made in the USA

SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514

Phone: 800.999.2550