


# SIGMA WATERWORKS


# HYDRANT BURY
## MECHANICAL JOINT: DUCTILE IRON 350

| Item# | Size | L Dim |
|---|---|---|
| DBM616 | 6x16 | 16.0 |
| DBM624 | 6x24 | 24.0 |
| DBM630 | 6x30 | 30.0 |
| DBM636 | 6x36 | 36.0 |
| DBM642 | 6x42 | 42.0 |
| DBM648 | 6x48 | 48.0 |
| DBM654 | 6x54 | 54.0 |

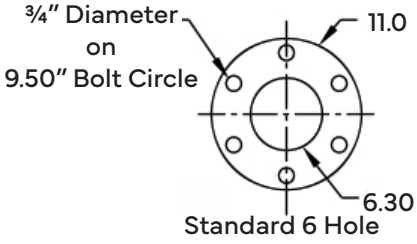

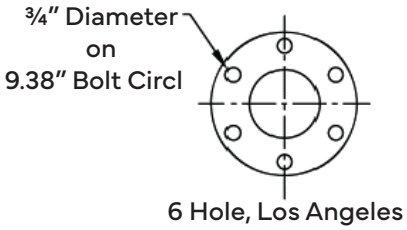



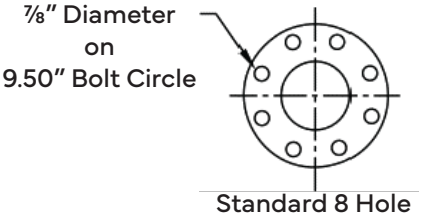


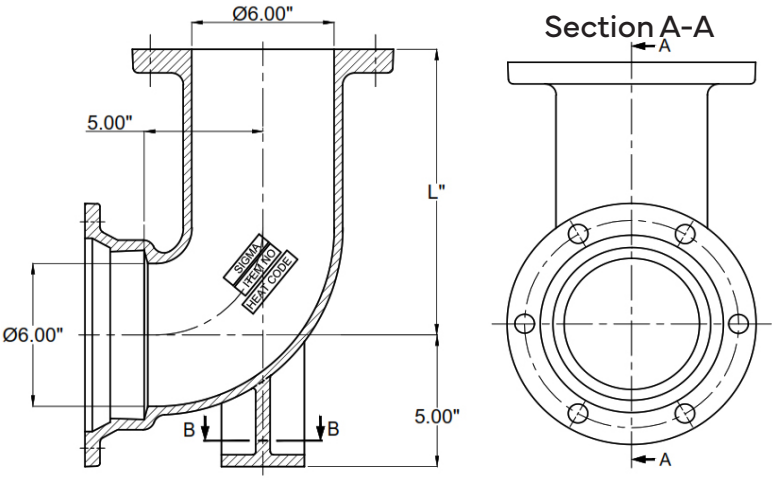





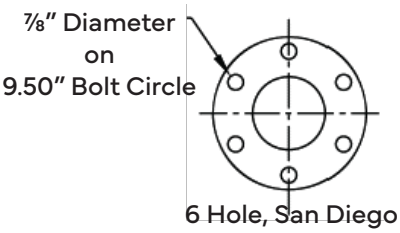

## Features & Specifications

01| **Material:** Ductile Iron, ASTM-A536, Grade 70-50-05, 65-45-12 or 60-42-10

02| **Pressure Rating:** 350psi

03| **Flanges are drilled:**
- **Standard 6 Hole** - 3/4" diameter on 9.5" bolt circle
- **Standard 8 Hole** - 7/8" diameter on 9.5" bolt circle diameter;
- **6 Hole (Las Angeles)** - 3/4" diameter on 9.38" bolt circle;
- **6 hole (San Diego)** - 7/8" diameter on 9.5" bolt hole diameter


04| **Cement-Mortar Line:** in Accordance with ANSI/AWWA C104/A21.4

05| **Asphaltic Seal Coat:** in Accordance with ANSI/AWWA C104/A21.4
**Fusion-Bonded (FBE):**in Accordance with ANSI/AWWA C116/A21.16

06| Conforms to AWWA C503-18 standard

07| NSF61 Certified

08| Drawing design is as per ANSI/AWWA C153/A21.53

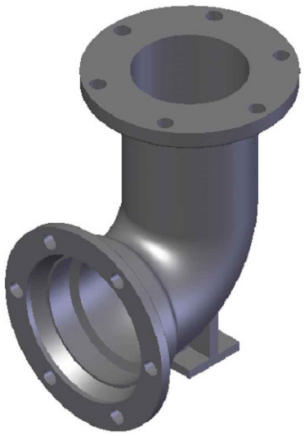


SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514
Phone: 800.999.2550