


SIGMA WATERWORKS


HYDRANT BURY
MECHANICAL JOINT: DUCTILE IRON 350


Item#	Size	L Dim
DBM616	6x16	16.0
DBM624	6x24	24.0
DBM630	6x30	30.0
DBM636	6x36	36.0
DBM642	6x42	42.0
DBM648	6x48	48.0
DBM654	6x54	54.0




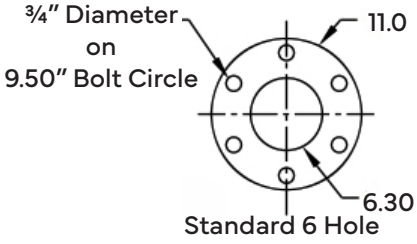

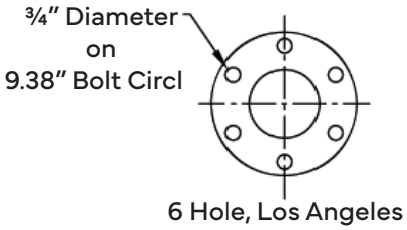

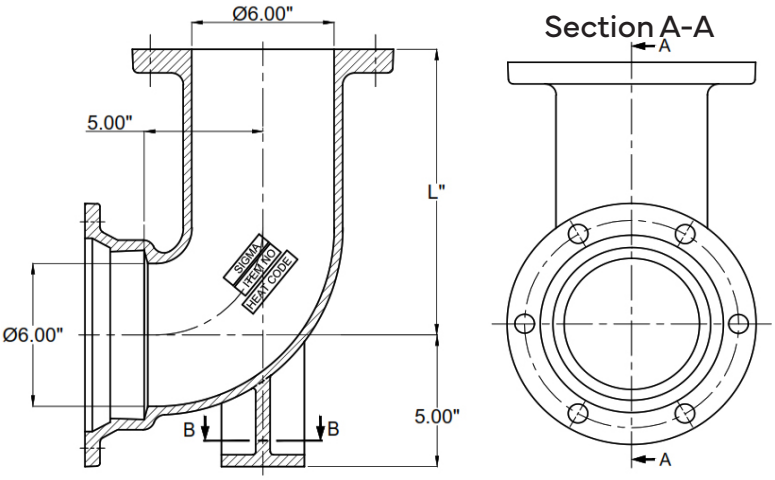

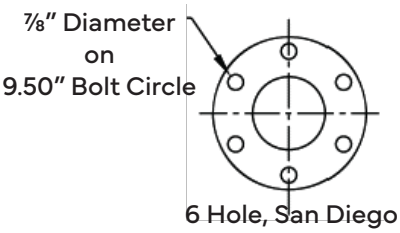

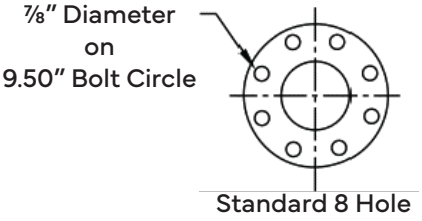

Features & Specifications

01| **Material:** Ductile Iron, ASTM-A536, Grade 70-50-05, 65-45-12 or 60-42-10

02| **Pressure Rating:** 350psi

03| **Flanges are drilled:**
- **Standard 6 Hole** - 3/4" diameter on 9.5" bolt circle
- **Standard 8 Hole** - 7/8" diameter on 9.5" bolt circle diameter;
- **6 Hole (Las Angeles)** - 3/4" diameter on 9.38" bolt circle;
- **6 hole (San Diego)** - 7/8" diameter on 9.5" bolt hole diameter


04| **Cement-Mortar Line:** in Accordance with ANSI/AWWA C104/A21.4

05| **Asphaltic Seal Coat:** in Accordance with ANSI/AWWA C104/A21.4
Fusion-Bonded (FBE):in Accordance with ANSI/AWWA C116/A21.16

06| Conforms to AWWA C503-18 standard

07| NSF61 Certified

08| Drawing design is as per ANSI/AWWA C153/A21.53

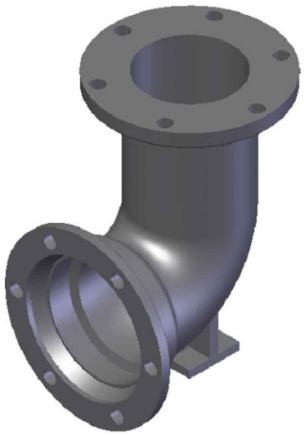


SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514
Phone: 800.999.2550


SIGMA WATERWORKS

HYDRANT BURY
PUSH-ON DUCTILE IRON 350


Item#	Size	L Dim
DBP612	6x12	12.0
DBP618	6x18	18.0
DBP624	6x24	24.0
DBP630	6x30	30.0
DBP636	6x36	36.0
DBP642	6x42	42.0
DBP648	6x48	48.0
DBP654	6x54	54.0




Section B-B

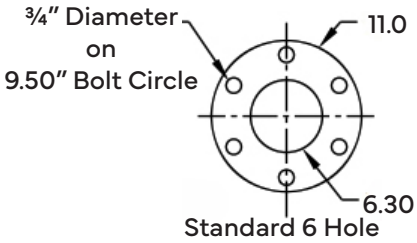


Standard 6 Hole

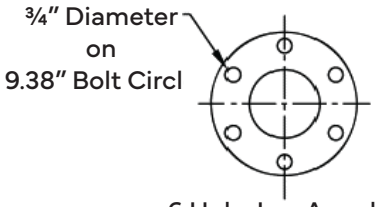


6 Hole, Los Angeles

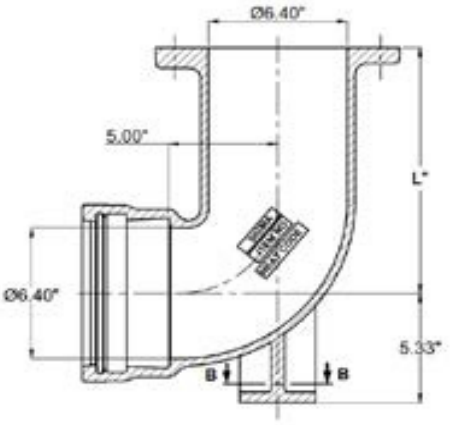


Section A-A

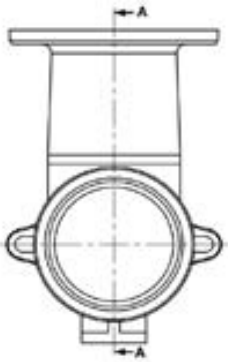

Sizes 612 to 654

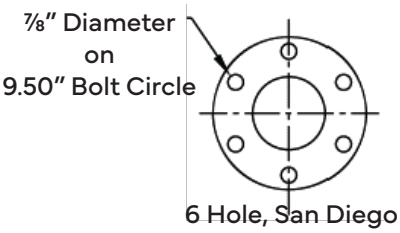

6 Hole, San Diego

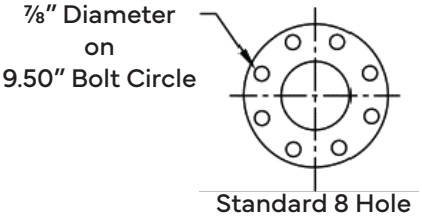

Standard 8 Hole

Features & Specifications

01| **Material:** Ductile Iron, ASTM-A536, Grade 70-50-05, 65-45-12 or 60-42-10

02| **Pressure Rating:** 350psi

03| **Flanges are drilled:**
- **Standard 6 Hole** - 3/4" diameter on 9.5" bolt circle
- **Standard 8 Hole** - 7/8" diameter on 9.5" bolt circle diameter;
- **6 Hole (Las Angeles)** - 3/4" diameter on 9.38" bolt circle;
- **6 hole (San Diego)** - 7/8" diameter on 9.5" bolt hole diameter



04| **Cement-Mortar Line:** in Accordance with ANSI/AWWA C104/A21.4

05| **Asphaltic Seal Coat:** in Accordance with ANSI/AWWA C104/A21.4
Fusion-Bonded (FBE):in Accordance with ANSI/AWWA C116/A21.16

06| Conforms to AWWA C503-18 standard

07| NSF61 Certified


08| Drawing design is as per ANSI/AWWA C153/A21.53


SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514
Phone: 800.999.2550

SIGMA WATERWORKS


HYDRANT BURY
MECHANICAL JOINT: DUCTILE IRON 350

Item#	Size	L Dim	Wt (Lbs)
XBM636-6-HI	6x36	36.0	120
XBM642-6-HI	6x42	42.0	127
XBM648-6-HI	6x48	48.0	146.3




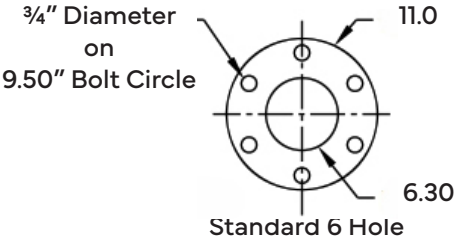


Standard 6 Hole

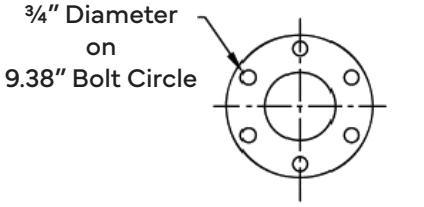


6 Hole, Los Angeles

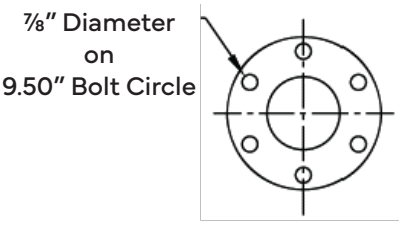


6 Hole, San Diego

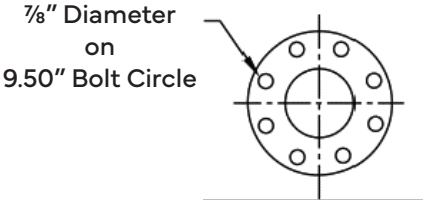

Standard 8 Hole

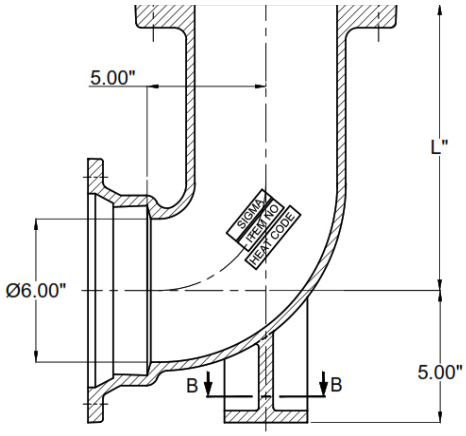

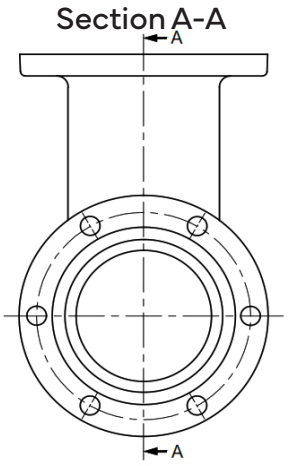

Features & Specifications

01| **Material:** Ductile Iron, ASTM-A536, Grade 70-50-05 or 60-42-10

02| **Pressure Rating:** 350psi

03| **Flanges are drilled:**
- **Standard 6 Hole** - 3/4" diameter on 9.5" bolt circle
- **Standard 8 Hole** - 7/8" diameter on 9.5" bolt circle diameter;
- **6 Hole (Las Angeles)** - 3/4" diameter on 9.38" bolt circle;
- **6 hole (San Diego)** - 7/8" diameter on 9.5" bolt hole diameter


04| **Cement-Mortar Line:** in Accordance with ANSI/AWWA C104/A21.4

05| **Asphaltic Seal Coat:** in Accordance with ANSI/AWWA C104/A21.4
Fusion-Bonded (FBE):in Accordance with ANSI/AWWA C116/A21.16

06| Conforms to AWWA C503-18 standard

07| NSF61 Certified

08| Drawing design is as per ANSI/AWWA C110/A21.10

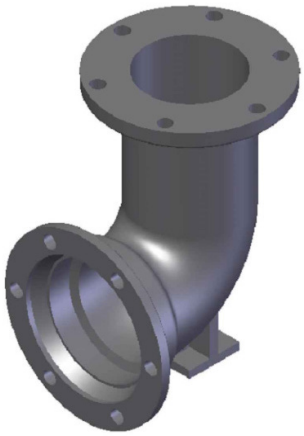

SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514
Phone: 800.999.2550