

SIGMA WATERWORKS

HYDRANT EXTENSIONS
CAST IRON


Item#	Size	H DIM	T DIM
CHX604	6x4	4.0	0.55
CHX606	6x6	6.0	0.55
CHX608	6x8	8.0	0.55
CHX610	6x10	10.0	0.55
CHX612	6x12	12.0	0.55
CHX614	6x14	14.0	0.55
CHX616	6x16	16.0	0.55
CHX618	6x18	18.0	0.55
CHX620	6x20	20.0	0.55
CHX622	6x22	22.0	0.55
CHX624	6x24	24.0	0.55
CHX626	6x26	26.0	0.55
CHX628	6x28	28.0	0.55
CHX630	6x30	30.0	0.55
CHX632	6x32	32.0	0.55
CHX636	6x36	36.0	0.55

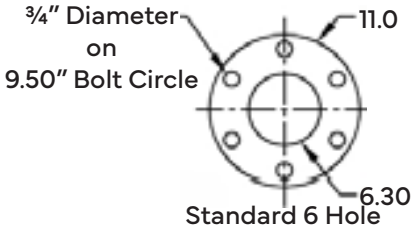


Standard 6 Hole

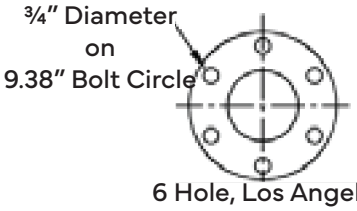

6 Hole, Los Angeles

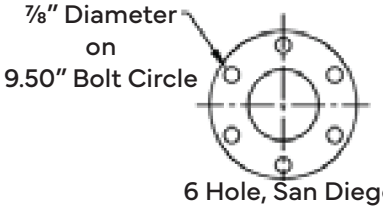

6 Hole, San Diego

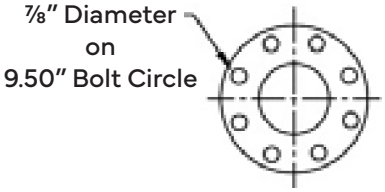

Standard 8 Hole



Features & Specifications

01| **Material:** Cast Iron, ASTM-A48, Grade-Class 30

02| **Pressure Rating:** 250psi


03| **Flanges are drilled:**
- **Standard 6 Hole** - 3/4" diameter on 9.5" bolt circle
- **Standard 8 Hole** - 7/8" diameter on 9.5" bolt circle diameter;
- **6 Hole (Las Angeles)** - 3/4" diameter on 9.38" bolt circle;
- **6 hole (San Diego)** - 7/8" diameter on 9.5" bolt hole diameter


04| **Cement-Mortar Line:** in Accordance with ANSI/AWWA C104/A21.4

05| **Asphaltic Seal Coat:** in Accordance with ANSI/AWWA C104/A21.4
Fusion-Bonded (FBE):in Accordance with ANSI/AWWA C116/A21.16

06| Conforms to AWWA C503-18 standard

07| NSF61 Certified

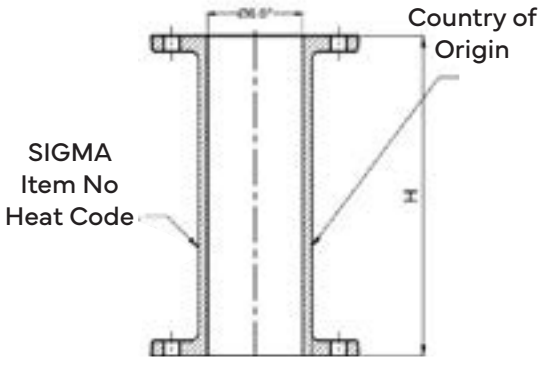



SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514
Phone: 800.999.2550