ONE-LOK ™ MODEL SLCEH

WEDGE HARNESS RESTRAINT FOR AWWA C900 PVC PIPE

Project Name: | Contractor: | Date:

Engineer: | Spec Section:

PRODUCT SPECIFICATIONS

Material:
Gland body, wedge inserts, break-off top actuating bolts and split non-serrated back-up ring are manufactured of high strength ductile iron in accordance with ASTM A536, Grade 65-45-12.

Pressure Rating:
Equal to the water working pressure rating of the pipe upon which it is installed.

Factor of Safety:
2:1

Size Range:
3"- 12"

Dimensions:
Manufactured in accordance with AWWA C900 PVC pipe.


Deflection:
Maintains the allowable nominal deflection within the PVC pipe manufacturer's recommendation for AWWA C900 PVC pipe bells.

Traceability:
Machine-serrated clamping rings are individually cast with exact heat code information.

Installations:
In accordance with manufacturer's recommendation and applicable AWWA standards.

OPTIONAL SPECIFICATIONS

Coatings	Asphaltic Black Enamel	☐
	Electro-Deposition "CORRSAFE™"	☐
	Others- Specify	☐
Bolts & Nuts	High Strength, Low Alloy Steel(HSLA) (In accordance with ANSI/AWWA C111/A21.11)	☐
	Stainless Steel ☐ Type 304 ☐ Type 316	☐
	Blue Fluoropolymer	☐
	Others- Specify	☐

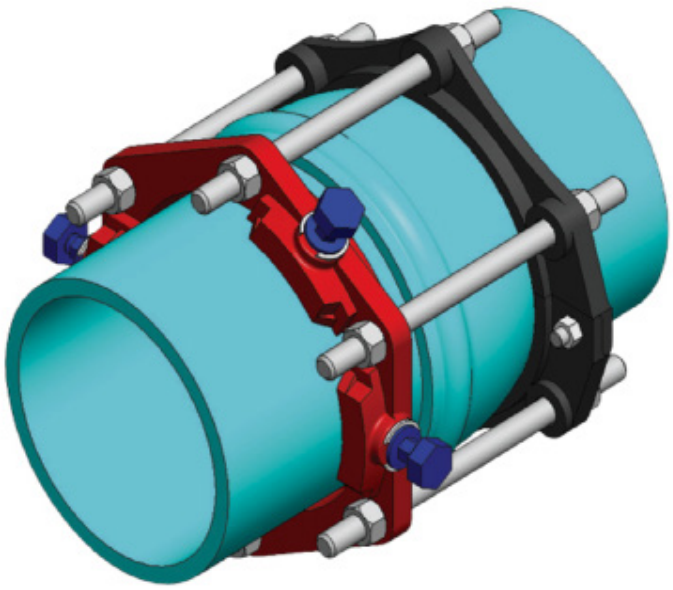

FM APPROVED


CLASSIFIED UL WATER QUALITY

Certified to NSF/ ANSI/CAN 61 and NSF/ANSI 372

UL

ONE-LOK ™ MODEL SLCEH

WEDGE HARNESS RESTRAINT FOR AWWA C900 PVC PIPE

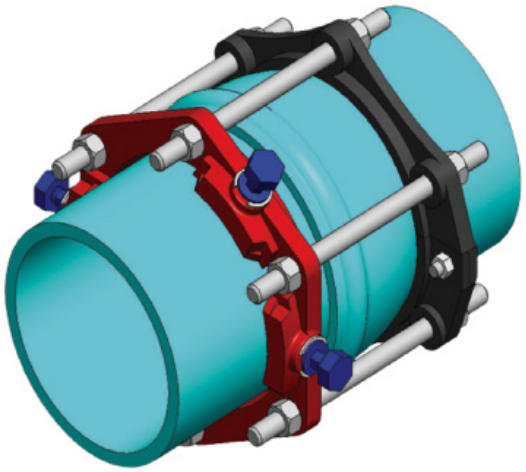

Dimensions in inches, Weight in pounds

	Size	Item No.	Pressure Rating	Rods Qty.	Rod Length	Rod Diameter	Minimum Rod Clearance	Weight of SG+One-Lok SLCE+Rod
☐	3	SLCEH3	235	4	17	5/8	5.45	13.61
☐	4	SLCEH4	235	4	17	3/4	6.75	19.18
☐	6	SLCEH6	235	6	18	3/4	8.75	29.76
☐	8	SLCEH8	235	6	18	3/4	11.00	36.84
☐	10	SLCEH10	235	8	24	3/4	13.25	50.40
☐	12	SLCEH12	235	8	24	3/4	15.50	73.62