
ONE-LOK™ MODEL SLDM

WEDGE-ACTION MECHANICAL JOINT RESTRAINT FOR OVERSIZED PIPE

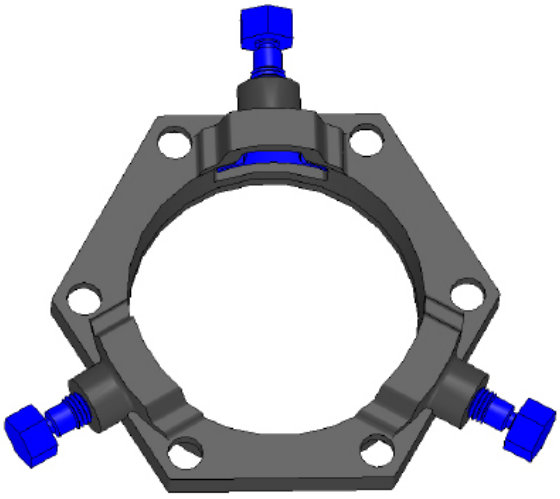

Product Specifications	
Material	• Gland body, wedge inserts and break-off top actuating bolts are manufactured of high strength ductile iron in accordance with ASTM A536, Grade 65-45-12. • Wedge inserts are heat-treated to a hardness of 370 BHN minimum.
Size Range	• 4"–16" and 20"
Dimension	• Conform to ANSI/AWWA C111/A21.11, ANSI/AWWA C153/A21.53, ANSI/AWWA C110/A21.10, ANSI/AWWA C150/A21.50 & ANSI/AWWA C151/A21.51 standards.
Pressure Rating	• 250 psi for 4"–14", 200 psi for 16", and 150 psi for 20"
Coating	• Grey or Green Alkyd Paint • Electro-deposition "CORRSAFE™" available upon request. For further information, please refer to our CORRSAFE Product Information sheet.
Deflection	• 5° for 4"–12", 2° for 14"–16", and 1-1/2° for 20"
Traceability	• Gland body, wedge inserts and break-off top actuating bolts are individually cast with exact heat code information.
Installation	• In accordance with manufacturer's recommendation and applicable AWWA standards.

SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514
Phone: 800.999.2550