
ONE-LOK™ MODEL SSLD

SPLIT WEDGE RESTRAINT FOR INSTALLED DUCTILE IRON PIPE

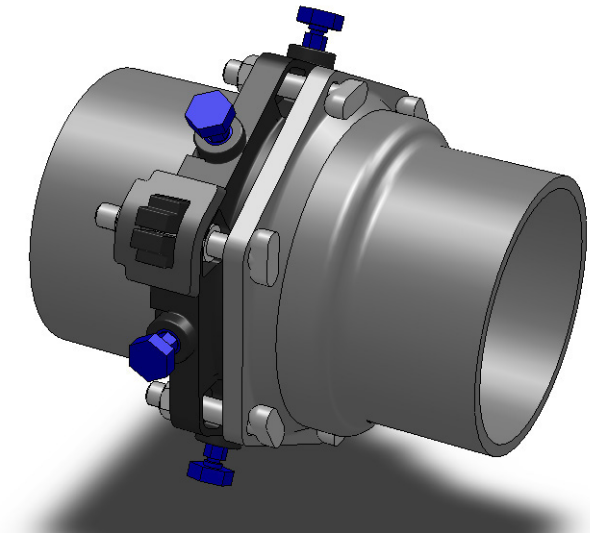

Product Specifications	
Material	• Gland body, wedge inserts, break-off top actuating bolts and side clamping brackets are manufactured of high strength ductile iron in accordance with ASTM A536, Grade 65-45-12. • Wedge inserts are heat-treated to a hardness of 370 BHN minimum.
Size Range	• 4" through 48"
Dimension	• Conform to ANSI/AWWA C111/A21.11, ANSI/AWWA C153/A21.53, ANSI/AWWA C110/A21.10, ANSI/AWWA C150/A21.50 & ANSI/AWWA C151/A21.51 standards.
Pressure Rating	• 350 psi on 4"–16", 250 psi on 18"–36", 200 psi on 42" and 175 psi on 48".
Coating	• Asphaltic black enamel • Electro-deposition "CORRSAFE™" available upon request. For further information, please refer to our CORRSAFE Product Information sheet.
Deflection	• 5° for 4"–12", 2° for 14"–16", 1-1/2° for 18"–24" and 1° for 30"–48"
Traceability	• Gland body, wedge inserts, break-off top actuating bolts and side clamping brackets are individually cast with exact heat code information
Installation	• In accordance with manufacturer's recommendation and applicable AWWA standards.

NOTE: THIS PRODUCT IS NOT DESIGNED TO BE USED ON PLAIN END FITTINGS.

SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514

Phone: 800.999.2550