
ONE-LOK™ MODEL SSLDH

SPLIT WEDGE HARNESS RESTRAINT FOR INSTALLED DUCTILE IRON PIPE



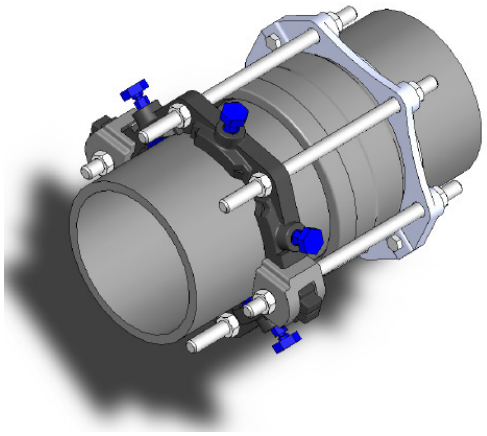

Product Specifications	
Material	• Gland body, wedge inserts, break-off top actuating bolts, side clamping brackets and split back-up ring are manufactured of high strength ductile iron in accordance with ASTM A536, Grade 65-45-12. • Wedge inserts are heat-treated to a hardness of 370 BHN minimum.
Size Range	• 4"–42"
Dimension	• Conform to ANSI/AWWA C111/A21.11, ANSI/AWWA C153/A21.53, ANSI/AWWA C110/A21.10, ANSI/AWWA C150/A21.50 & ANSI/AWWA C151/A21.51 standards.
Pressure Rating	• 350 psi for 4”–8”, 300 psi for 10”–16”, 250 psi for 18”–36”, and 200 psi for 42”
Coating	• Asphaltic Black Enamel • Electro-deposition “CORRSAFE™” available upon request. For further information, please refer to our CORRSAFE Product Information sheet.
Deflection	• 5° for 4”–12”, 2° for 14”–16”, 1-1/2° for 18”–24”, and 1° for 30”–42”
Traceability	• Gland body, wedge inserts, break-off top actuating bolts, side clamping brackets and split back- up ring are individually cast with exact heat code information.
Installation	• In accordance with manufacturer’s recommendation and applicable AWWA standards.

NOTE: THIS PRODUCT IS NOT DESIGNED TO BE USED ON PLAIN END FITTINGS.

SIGMA Waterworks
700 Goldman Drive
Cream Ridge, NJ 08514

Phone: 800.999.2550